

Zeroizing an Extension

Zeroizing (or resetting) an extension to its default setting can be a useful tool, especially when an extension is being given to a new user. Zeroizing is irreversible, so make sure the correct extension has been selected before confirming the process.

Zeroizing will:


- Default all extension settings.
- Delete all voicemails and faxes owned by this extension.
- Delete all recordings owned by this extension.
- Clear speed dials.
- Reset the inbound behavior.
- Remove the extension from all classes.
- Remove the extension from all hunt groups.

Zeroizing will not:

- Change the extension number.
- Remove the extension from any inbound behaviors used within the account, such as auto attendants and menus.

How to Zeroize an Extension


1. Login to the NocTel Control Panel
2. Click on **Extensions** in the left-hand menu.

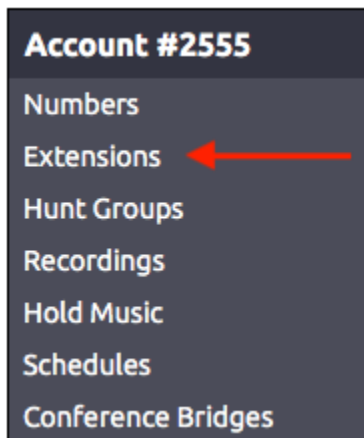

3. Locate the extension that will be zeroed in the list, or search for it using the search box. Click on the Extension to open the extension's options page.
4. Click the **Permissions** link under the extension name and number.



5. On the **User Permission** tab click the **"Zeroize extension"** link located next to the **Submit** button.

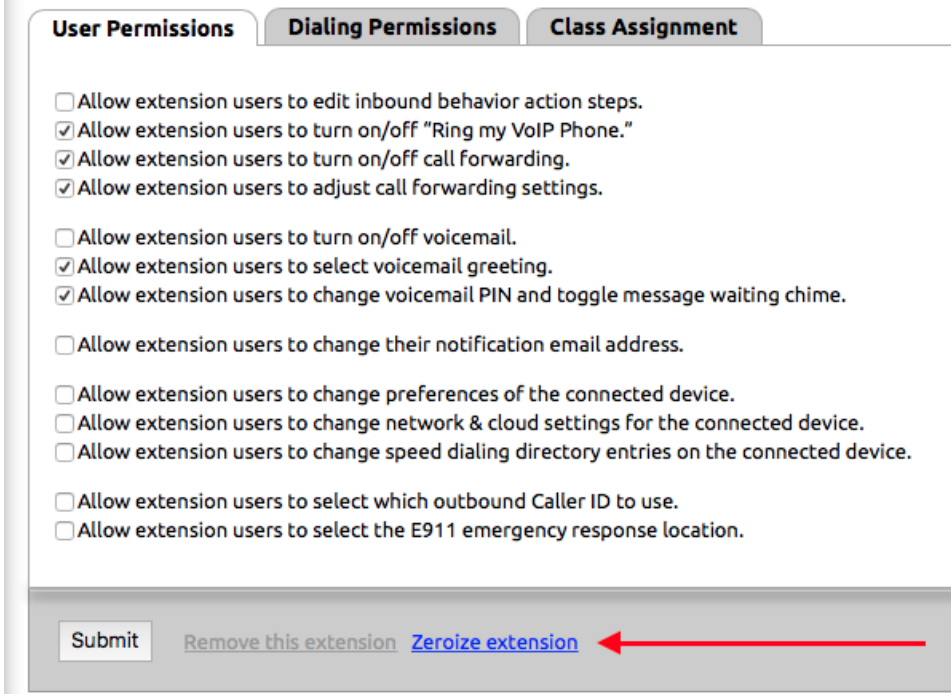


User Permissions **Dialing Permissions** **Class Assignment**

- ☐ Allow extension users to edit inbound behavior action steps.
- ☒ Allow extension users to turn on/off "Ring my VoIP Phone."
- ☒ Allow extension users to turn on/off call forwarding.
- ☒ Allow extension users to adjust call forwarding settings.
- ☐ Allow extension users to turn on/off voicemail.
- ☒ Allow extension users to select voicemail greeting.
- ☒ Allow extension users to change voicemail PIN and toggle message waiting chime.
- ☐ Allow extension users to change their notification email address.
- ☐ Allow extension users to change preferences of the connected device.
- ☐ Allow extension users to change network & cloud settings for the connected device.
- ☐ Allow extension users to change speed dialing directory entries on the connected device.
- ☐ Allow extension users to select which outbound Caller ID to use.
- ☐ Allow extension users to select the E911 emergency response location.

Submit [Remove this extension](#) [Zeroize extension](#)

6. After clicking the link a new **pop up window** will appear asking you to confirm the zeroizing of the extension. Ensure it is the correct extension and click **OK**.

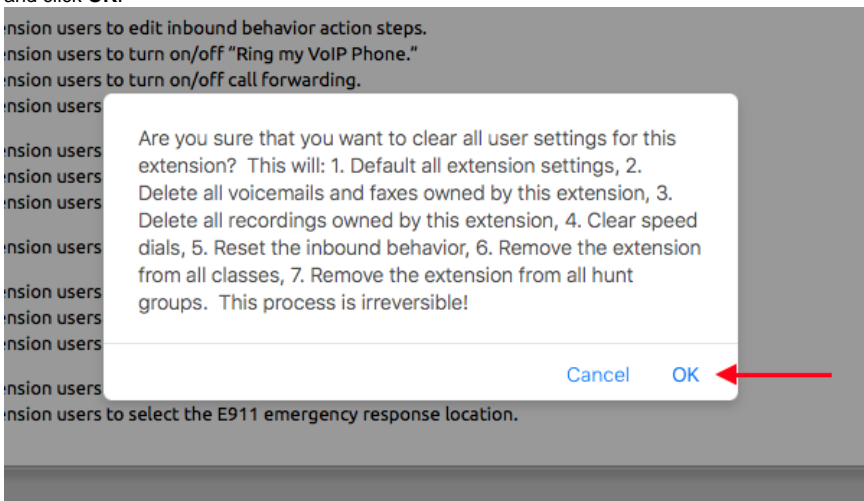

Are you sure that you want to clear all user settings for this extension? This will: 1. Default all extension settings, 2. Delete all voicemails and faxes owned by this extension, 3. Delete all recordings owned by this extension, 4. Clear speed dials, 5. Reset the inbound behavior, 6. Remove the extension from all classes, 7. Remove the extension from all hunt groups. This process is irreversible!

[Cancel](#) [OK](#)

7. The extension's name will be changed to **Zeroized Extension** once complete.



Note: Zeroizing and extension can only be done on a single extension at a time, bulk zeroizing is not supported.

Related articles

- [Factory Resetting a Polycom VVX Phone](#)
- [Exporting a Extension List](#)
- [Editing an Extension's Name and Number](#)
- [Deleting an Extension](#)
- [Adding a Generic SIP Extension](#)